



The cabezal MF-2 is a standard flow mulching attachment suitable to compact track loader of more than 5 t. stock with the hydraulic auxiliary existing circuit.


Suitable for the maintenance of small greenspaces, riverbanks, canes and bushes up to 3 cm. of diameter.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor with grass flails or small forged agricultural hammers SERRAT or special "grass".
- ▶ Mulcher for head compact track loader having a weight until 5 t.
- ▶ 3 XPB side belt transmission.
- ▶ Safety chains.
- ▶ High speed and high strength bearings.
- ▶ Hydraulic gear motor.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Hydraulic gear motor

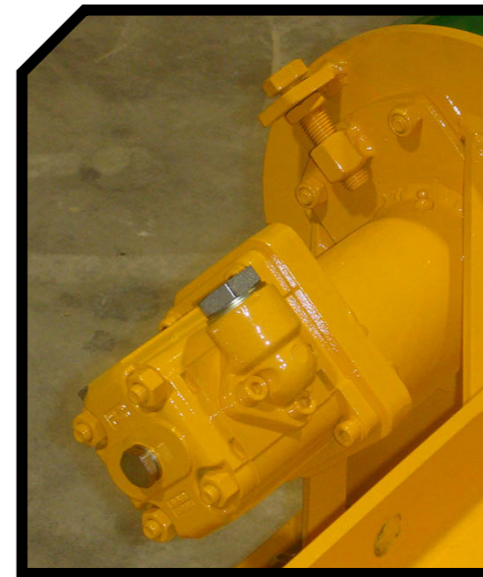

Rotor with grass flails and grass flails on shackles (1)



Safety chains (2)

(1)
(2)

MODEL	mm	POWER mín. req.	máx. aut.			KG	Nº BELTS TYPE	A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	70-80 l/min	250 bar	40	12	560	3 XPB	1610	63"	940	37"	726	29"	2500

Valve of circulation



OPTIONS



▶ Hydraulic rear hood

