


serrat

IBP


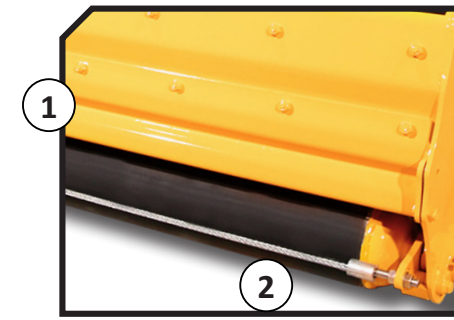
Mulcher designed for tractors between 30 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 50 mm.



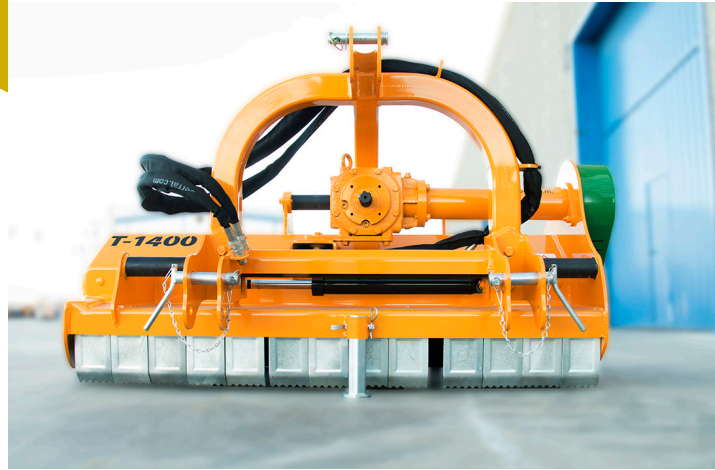



CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Gearbox with freewheel included.
- ▶ 3 XPB side belt transmission.
- ▶ Forged hammers SERRAT special "grass".
- ▶ 2 lines of counter knives screwed.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm.
- ▶ Double bearing on rear roller.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ Width cover belts 84 mm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hood
2. Detail of the roller



MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-900	900	22 - 30 60 - 80	8	320	3 XPB	1075	42"	1130	44"	1000	39"	540
T-1200	1200	30 - 40 60 - 80	9	365	3 XPB	1375	54"	1130	44"	1000	39"	540
T-1400	1400	34 - 45 60 - 80	12	395	3 XPB	1575	62"	1130	44"	1000	39"	540
T-1600	1600	37 - 50 60 - 80	12	418	3 XPB	1775	70"	1130	44"	1000	39"	540
T-1800	1800	45 - 60 60 - 80	16	430	3 XPB	1975	71"	1130	44"	1000	39"	540
T-2000	2000	52 - 70 60 - 80	16	476	3 XPB	2175	86"	1130	44"	1000	39"	540

OPTIONS



▶ Rear gum



▶ Front adjustable skid shoes only for straight side



▶ Hydraulic side shift




▶ Rear tine retainers



▶ Rounded side

serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es

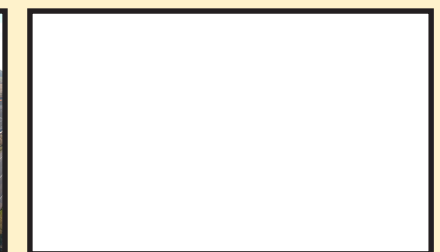

The data presented in this catalog are provided for information purposes only and are not binding.