



Mulcher to the service of the fruit sector, for the elimination of prunings and agricultural residues, as well as, for the maintenance of green spaces.


Its fixed configuration allows to choose the position of the gearbox to centre the machine to the work.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Tubular rotor of Ø 420 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ Hammers guaranteed against breakage.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




System antiwire in rotor

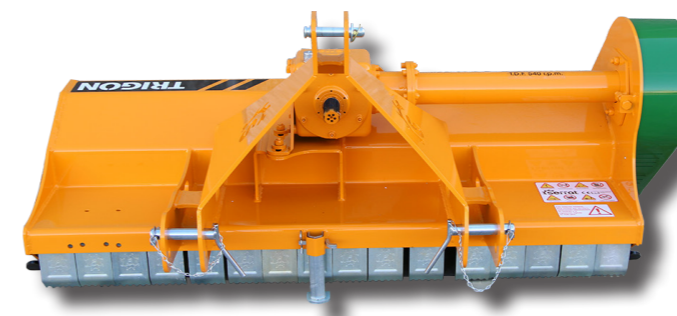


MODEL	mm	KW-HP	mm	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1000	1000	29 - 40 60 - 80	8	400	3 XPC	1195	47"	1230	48"	868	34"	540
T-1100	1100	29 - 40 60 - 80	8	416	3 XPC	1295	51"	1230	48"	868	34"	540
T-1250	1250	33 - 45 60 - 80	12	453	3 XPC	1445	57"	1230	48"	868	34"	540
T-1400	1400	38 - 50 60 - 80	12	478	3 XPC	1595	63"	1230	48"	868	34"	540
T-1600	1600	40 - 55 60 - 80	12	510	3 XPC	1795	71"	1230	48"	868	34"	540
T-1800	1800	44 - 60 60 - 80	16	555	3 XPC	1995	79"	1230	48"	868	34"	540
T-2000	2000	51 - 70 60 - 80	16	587	3 XPC	2195	86"	1230	48"	868	34"	540

OPTIONS

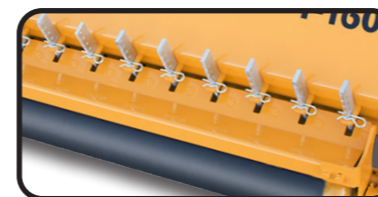

▶ Rear tine retainers

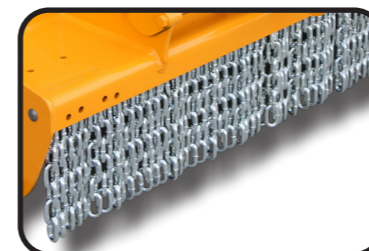

▶ Front chains



▶ Freewheel
▶ Rear wheels




▶ Front adjustable skid shoes

▶ Front wheels



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.