

serrat

EVOLUTION SIDE SHIFT REAR HOOD




Mulcher of hammers, for the elimination of remains of pruning up to 80 mm and maintenance of vegetable mantle. Ideal for the regeneration of meadows and grassland.

Rotor POLSER of 450 mm of diameter. Excellent results in industrial gardening and maintenance of borders.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller Ø 180 mm.
- ▶ PTO 540 rpm.
- ▶ Rear roller cleaner.
- ▶ Steel counter hammers.
- ▶ Rear hydraulic hood with sieve.
- ▶ Front skid shoes.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.

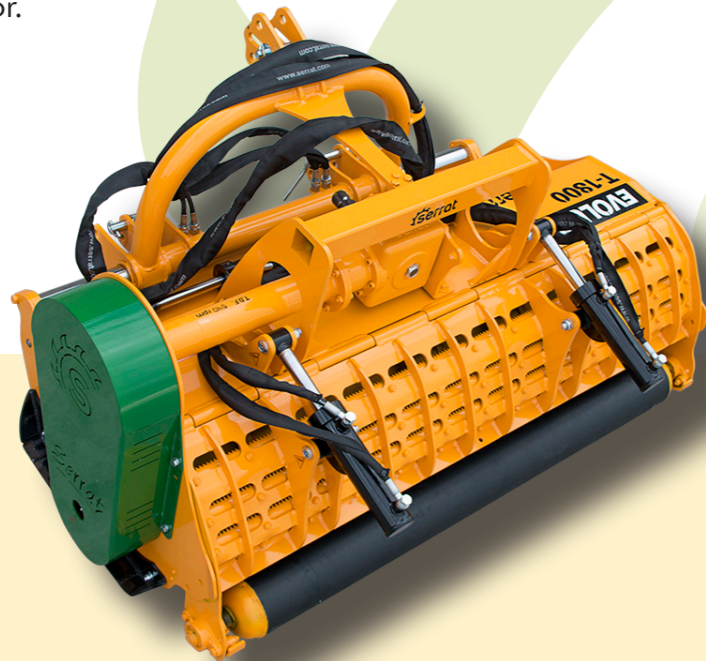

Obturations antiwire in rotor



MODEL

MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1400	1400	44 - 60 88 - 120	12	640	3 XPC	1570	62"	1205	47"	950	37"	540
T-1600	1600	48 - 65 88 - 120	12	678	3 XPC	1790	70"	1205	47"	1040	41"	540
T-1800	1800	51 - 70 88 - 120	16	730	3 XPC	1990	78"	1205	47"	1040	41"	540
T-2000	2000	55 - 75 88 - 120	16	782	3 XPC	2190	86"	1205	47"	1040	41"	540
T-2100	2100	59 - 80 88 - 120	16	802	3 XPC	2490	98"	1205	47"	1040	41"	540
T-2300	2300	63 - 85 88 - 120	20	889	3 XPC	2690	106"	1205	47"	1040	41"	540

OPTIONS


▶ Freewheel



▶ Super hydraulic side shift

serrat

Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tfno. (+34) 974 417 830
www.serrat.com - comercial@serrat.es

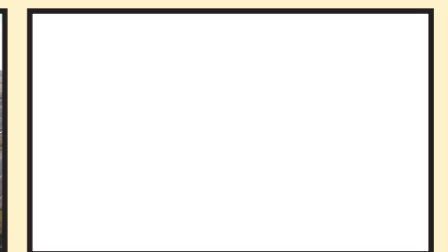

The data presented in this catalog are provided for information purposes only and are not binding.