SETTOL PROREVERSIBLE





Mulcher conceived for the maintenance of vegetable mantle, regeneration of meadows, grassland and to mulch remains of prunings. It is a mulcher of universal use and with highest realiability.

Rotor POLSER of 550 mm of diameter for prunings up to 100 - 120 mm of diameter. It's reversible configuration allows to drive tre machine well in the rear power lift as in the front in reversible tractors avoiding to tread on the material to mulch.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ► Gearbox SERRAT.
- ▶ 3/4 XPC side belt transmission.
- ► Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ► Front protection curtain.

- ► System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ► Rear height-adjustable roller Ø 180 mm (210 mm from T-2000).
- ▶ PTO 540 rpm (1,000 rpm from T-2500).
- ► Rear roller scraper.
- ▶ 3 lines of counter hammers.
- ► Model built under EC Normative.
- ► Safety indicators visible to personnel.



System antiwire in rotor

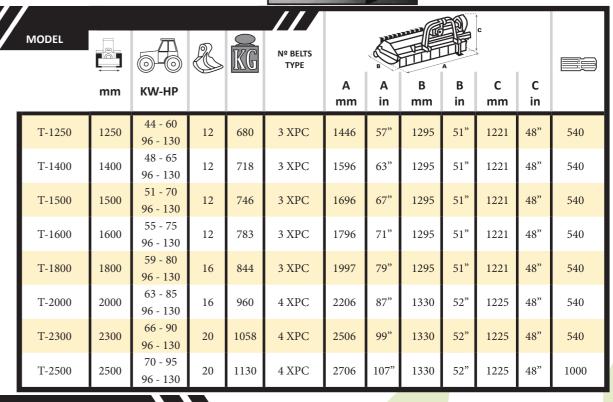

OPTIONS

▶ Green x1

▶ Green x2



Freewheel

▶ Front gum



► Rear gum





► Front chains



► Rear tine retaines

► Preparation for vineyard



► Front adjustable skid shoes



► Reinforced roller



22310 Castejón del Puente (Huesca)-España Tfno. (+34) 974 417 830 www.serrat.com - comercial@serrat.es





The data presented in this catalog are provided for