SETTOL REVERSIBLE SIDE SHIFT






Mulcher for extensive agriculture (maize, sorghum, sunflower, cotton and all kinds of plant residue). It incorporates rotor POLSER which, thanks to its diameter, is capable of generating a great aspiration and raising the material from the furrow. Ideal for the regeneration of meadows and grasslands.

Its reversible and movable configuration allows to protect the tractor avoiding to tread on the material to mulch and fits laterally the work camp by a hydraulic cylinder.

CHARACTERISTICS

- ► Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ► Gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ► Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.

- ► Front protection curtain.
- ► System antiwire in rotor.
- ► Double bearing on rear roller.
- ► Rear height-adjustable roller.
- ▶ PTO 1,000 rpm.
- ▶ 3 lines of counter hammers.
- ▶ Model built under EC Normative.
- ► Safety indicators visible to personnel.

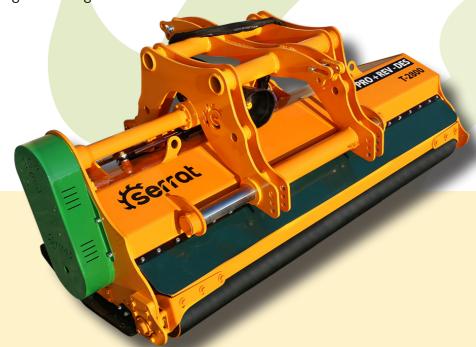

System antiwire in rotor



Rear height-adjustable roller



MODEL					KG	Nº BELTS TYPE	C C C C C C C C C C C C C C C C C C C						
		mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
	T-2300	2300	66 - 90 112 - 150	20	1628	4 XPC	2553	100"	1434	56"	1200	47"	1000
	T-2500	2500	74 - 100 112 - 150	20	1690	4 XPC	2753	108"	1434	56"	1200	47"	1000
	T-2800	2800	81 - 110 112 - 150	28	1797	4 XPC	3053	120"	1434	56"	1200	47"	1000
	T-3200	3200	97 - 130 112 - 150	32	1925	4 XPC	3453	136"	1434	56"	1200	47"	1000

OPTIONS

▶ Double geardrives



► Front chains



► Rear gum

▶ Freewheel



► Rear tine retaines



► Front gum

▶ 540 rpm PTO



► Front adjustable skid shoes



► Reinforced roller



22310 Castejón del Puente (Huesca)-España Tfno. (+34) 974 417 830 www.serrat.com - comercial@serrat.es





The data presented in this catalog are provided fo information purposes only and are not binding.