



Mulcher for the mixed utilization in remains of crop of maize, sorghum, sunflower, wheat, barley, etc. As well as, in the preparation for the dried one of herbaceous cultures (ray grass).

It incorporates hydraulic rear gate and turn able nozzles to scatter fresh straw. Rotor POLSER of 650 mm of diameter, equipped with different elements of cut: Y blades or hammers.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER of Ø 650 mm.
- ▶ Gearbox SERRAT power up to 150 HP.
- ▶ 4 XPC side belt transmission.
- ▶ Stamped hammers or Y blades.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Interchangeable counter hammers.
- ▶ Rear roller Ø 210 mm.
- ▶ PTO 1,000 rpm.
- ▶ Rear hydraulic hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Rear hydraulic hood



System antiwire in rotor

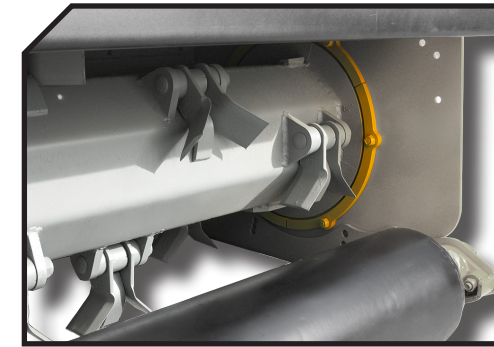


Rear roller Ø 210 mm

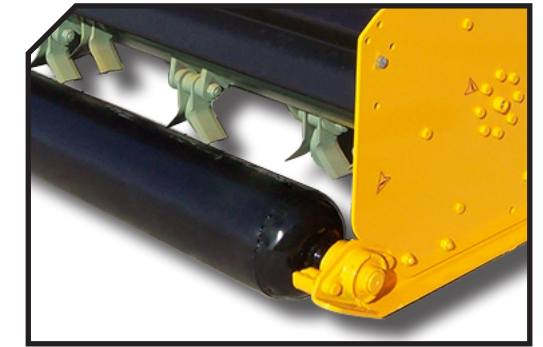

MODEL	mm	KW-HP	24	80	1255	4 XPC	Nº BELTS TYPE						
							A mm	A in	B mm	B in	C mm	C in	
T-2300	2300	74 - 100 112 - 150	24	80	1255	4 XPC	2545	100"	1750	69"	1200	47"	1000
T-2500	2500	74 - 100 112 - 150	24	80	1310	4 XPC	2745	108"	1750	69"	1200	47"	1000
T-2800	2800	88 - 120 112 - 150	24	80	1395	4 XPC	3045	120"	1750	69"	1200	47"	1000
T-3200	3200	96 - 130 112 - 150	32	96	1527	4 XPC	3445	136"	1750	69"	1200	47"	1000

OPTIONS

- ▶ Double geardrives
- ▶ Freewheel

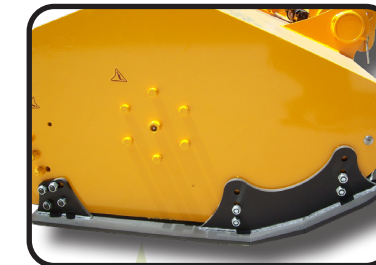


▶ Front adjustable skid shoes




▶ Adjustable nozzle



▶ Front chains



▶ Hammers



▶ Blades in Y-form



▶ Adjustable wheels

