



Soil preparation machine up to a depth of 180 mm, for tractors between 100 - 130 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.


### CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor FIXE TOP of Ø 550 mm.
- ▶ Gearbox SERRAT for 130 HP.
- ▶ 5 XPC belt transmission.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ PTO 540 rpm.
- ▶ Rear hydraulic hood.
- ▶ Protection chains.
- ▶ Chassis internal reinforcements, thickness 10 mm.
- ▶ System antiwire in rotor.
- ▶ Compact drive cover.
- ▶ Rear roller into the hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



1. Rear hydraulic hood
2. Compact drive cover
3. Rear roller into the hood

### FIXE TOP System

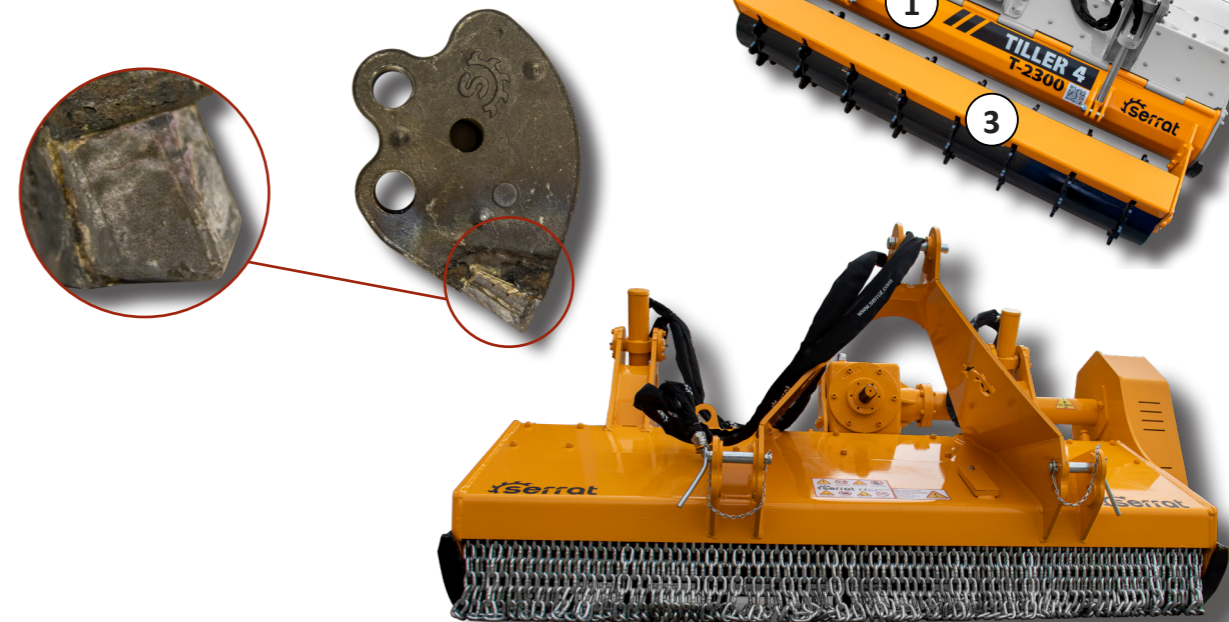

\*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL	mm	KW-HP	KG	Nº BELTS TYPE	DIMENSIONS							
					A mm	A in	B mm	B in	C mm	C in		
T-1600	1600	74 - 100 97 - 130	34	1500	5 XPC	1880	74"	1340	53"	1010	40"	1000
T-1800	1800	74 - 100 97 - 130	38	1580	5 XPC	2080	82"	1340	53"	1010	40"	1000
T-2000	2000	74 - 100 97 - 130	44	1710	5 XPC	2280	90"	1340	53"	1010	40"	1000

### OPTIONS

- ▶ Centralized greasing

