



## TILLER 6




Soil preparation machine up to a depth of 300 mm, for tractors between 250 - 300 HP. Transforms forest land, with stumps and rocks, in land for cultivation avoiding accidents in later processes.

### CHARACTERISTICS

- Steel-plate chassis, thickness 10 mm.
- Rotor FIXE TOP of Ø 625 mm.
- Centralising greasing system.
- Gearbox SERRAT for 300 HP.
- Double synchronous belt transmission.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- PTO 1,000 rpm.
- Rear hydraulic hood.
- Front hydraulic hood anti projections.
- Chassis internal reinforcements, thickness 10 mm.
- System antiwire in rotor.
- Compact drive cover.
- Hydraulic levelling roller.
- Model built under EC Normative.
- Safety indicators visible to personnel.




1. Rear hydraulic hood
2. Compact drive cover

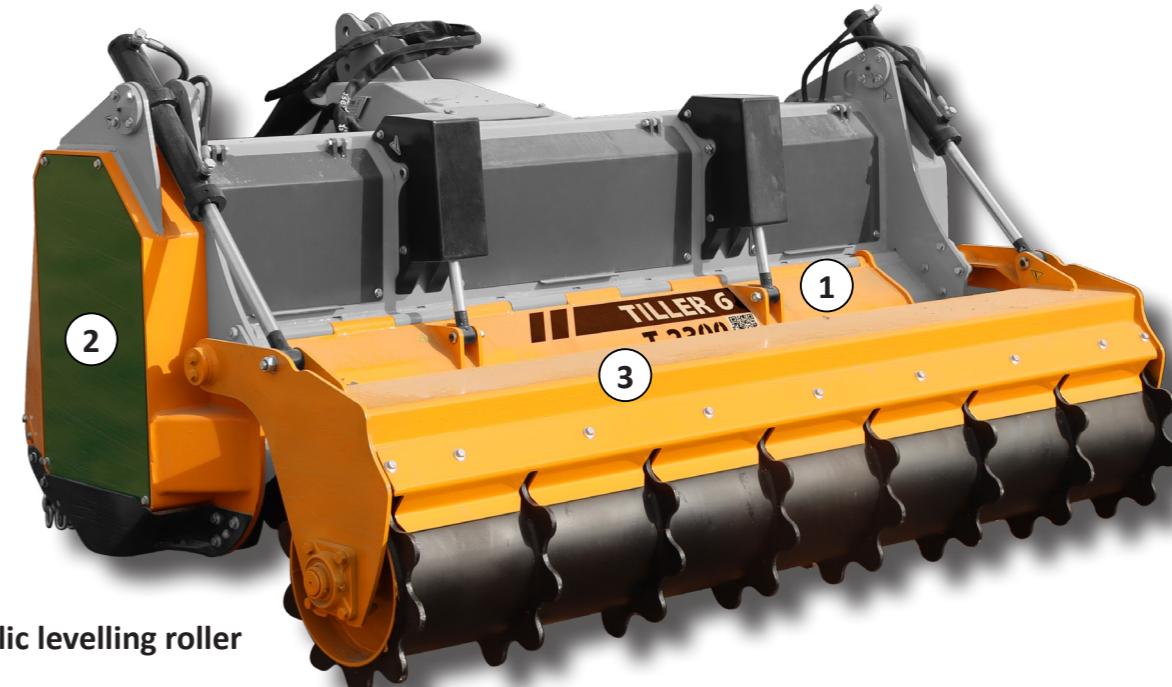

3. Hydraulic levelling roller



FIXE TOP System



\*For working in depth it is recommended that the tractor has a Creeper or Vario.

MODEL	mm	KW-HP	KG	Nº BELTS TYPE	A mm		A in		B mm		B in		C mm		C in	
					B	A	B	A	B	A	C	C	C	C	C	
T-2000	2000	186 - 250 224 - 300	44	1990	2	Synchronous	2345	92"	1840	72"	1380	54"	1000			
T-2500	2500	186 - 250 224 - 300	56	2200	2	Synchronous	2645	104"	1840	72"	1380	54"	1000			
T-3000	3000	186 - 250 224 - 300	68	2290	2	Synchronous	2845	112"	1840	72"	1380	54"	1000			



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tfno. (+34) 974 417 830  
[www.serrat.com](http://www.serrat.com) - [comercial@serrat.es](mailto:comercial@serrat.es)



The data presented in this catalog are provided for information purposes only and are not binding.