



Mulcher for the cut and withdrawal of grass and branches up to 80 mm of diameter. Cleanliness of gardens, facilities sports and withdrawal of pruning in vineyard and fruit-bearing trees.

Great capacity of absorption for the withdrawal of leaves and all kinds of garbages (tins, papers, bottles of plastic, bags, etc.). Collection of aromatic plants.

CHARACTERISTICS


- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Hammers guaranteed against breakage.
- ▶ Side belt transmission.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Basket of storage.
- ▶ Hydraulic unload.
- ▶ PTO 540 rpm.
- ▶ Short skid shoes.
- ▶ Height-adjustable rear roller.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





Storage




Rear height-adjustable roller

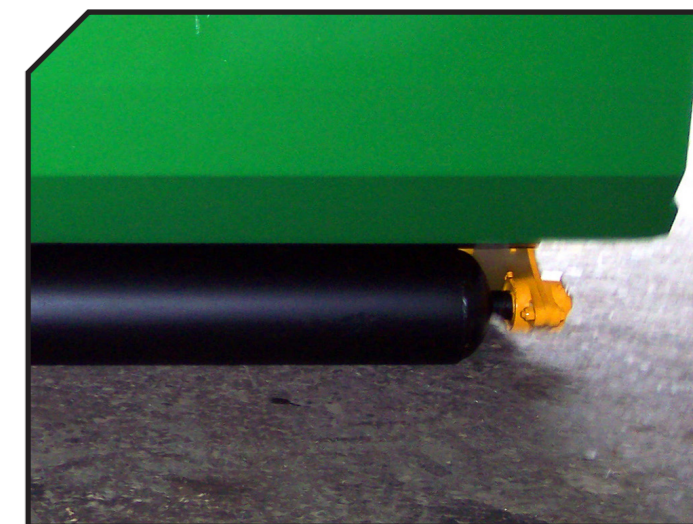


MODEL	mm	KW-HP		CAPACITY HOPPER	KG	Nº BELTS TYPE							
							A mm	A in	B mm	B in	C mm	C in	
T-1800	1800	63 - 85 96 - 130	16	2,3 m ³	1170	3 XPC	2060	81"	2179	86"	1558	61"	540
T-2000	2000	63 - 85 96 - 130	16	2,5 m ³	1255	3 XPC	2260	89"	2179	86"	1558	61"	540

OPTIONS

▶ Freewheel

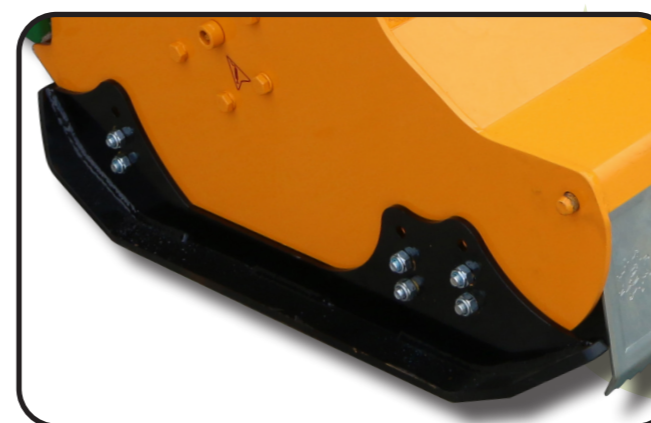

▶ Long skid shoes

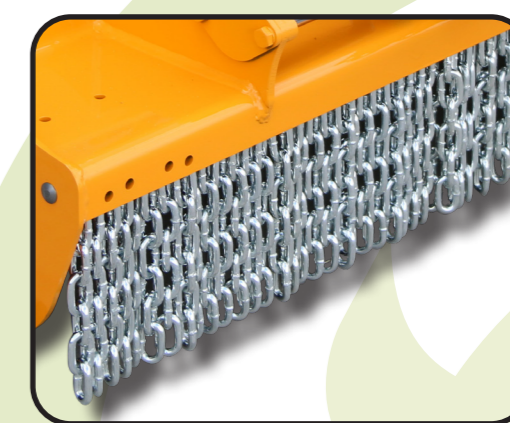

▶ Front chains

