



# ABATIBLE EVOLUTION



Mulcher conceived for very large farms and agricultural contractors. Robust machine designed for very intensive mulching, intended for mulching grass in orchards, nurseries and park maintenance, straw, maize stalks, and on fallow land. Depending on the plantation, different working widths can be set between 3,60 m and 4 m thanks to our hydraulic beam. The innovative and practical device for opening and closing the rotors is equipped with special hitches and safety valves for transport. The 480 mm diameter mulching rotor delivers maximum throughput. A heavy steel beam forms a fixed leveling point, relative to which the two rotor structure can be lifted and lowered, the two rotor overlap and can work independently of each other. It gives also better users visibility across the whole working width. The inside belt transmission allows us to approach the lateral edges as close as possible to the feet of the trees.

## CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT with freewheel.
- ▶ 2 x 3 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable rollers Ø 210 mm.
- ▶ PTO 1,000 rpm.
- ▶ Hydraulic folding exclusive design by SERRAT.
- ▶ Reversible.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



## Reversible



## Hydraulic folding exclusive design by SERRAT




MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-3600	3600	74 - 100 104 - 140	16 + 16	1742	2 x 3 XPC	3700	146"	2085	82"	1220	48"	1000
T-4000	4000	74 - 100 104 - 140	20 + 20	1845	2 x 3 XPC	4100	161"	2085	82"	1220	48"	1000

## OPTIONS



▶ Preparation for reversible tractor

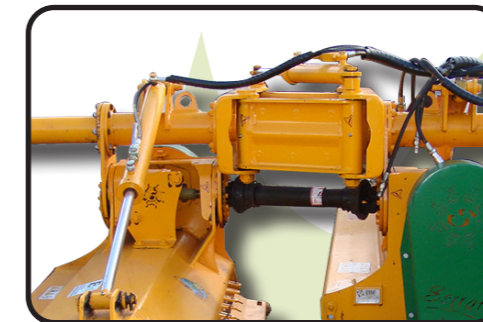


▶ With the EXTENDABLE SYSTEM we will increase the weight of 140 kg.



▶ Rear tine retainers



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tfno. (+34) 974 417 830  
www.serrat.com - comercial@serrat.es



The data presented in this catalog are provided for information purposes only and are not binding.